



• Nozzle + Accessories for Urea Refuelling

Construction Details · Materials Weight · Application	Hose Inlet Thread Type/Size G	Part Number Type	
<p>ZVA AdBlue</p> <p>: Construction similar to standard type ZVA Slimline with automatic shut-off and safety cut out ball valve, check valve, 3-speed lever latch with removable latch pin EB 280, and screen EK 172. Available either with fixed hose inlet 'F' or special swivel 'EA 075 AdBlue' of stainless steel.</p> <p>Body of aluminium nickel plated, spout aluminium, inner parts stainless steel / plastic. Hose inlet of stainless steel. Lever rilsan plated (blue), scuffguard and comfigrip PVC, seals NBR. Spout with magnet opening. To avoid mistuellings nozzle will only open in combination with magnet adapter ELAFIX 40 for the filler neck.</p> <p>Weight of nozzle = 1,1 kg</p> <p>ZVA AdBlue SS</p> <p>: like ZVA AdBlue, but body of stainless steel. Weight of nozzle = 1,65 kg</p>	fixed R1" AG 1" BSP male	ZVA *)F-AdBlue	<p>Automatic nozzle ZVA DN 15 of nickel plated aluminium (ZVA AdBlue SS of stainless steel) for "AdBlue" urea solution according DIN 70070. Flow rate up to 40 l/min, working pressure 0,5 - 3,5 bar, minimum pump output 20 l/min.</p>  <p>ZVA AdBlue ZVA AdBlue SS</p> <p>*) Please state required guard type</p>
	swivel R1" AG 1" BSP male	ZVA *)-AdBlue	
	fixed R1" AG 1" BSP male	ZVA ...F-AdBlue SS (*)	
	swivel R1" AG 1" BSP male	ZVA ...-AdBlue SS (*)	

<p>ELAFIX 40 is installed by the original equipment manufacturer into a modified vehicle filler neck, (DN 40 or larger).</p> <p>Refuelling with the ZVA AdBlue nozzle is only possible in combination with the ELAFIX 40 magnet adapter. The fixed magnetic field within the filler neck opens the magnet switch in the spout, so misfuelling into petrol or Diesel tanks is made impossible. The filling of the AdBlue tank with fuel is also excluded, because petrol and Diesel spouts do not fit into the ELAFIX 40 magnet adapter. Materials: body of POM, capsulated ring magnet.</p> <p>Weight = 60 g</p>	ELAFIX 40	<p>Magnet adapter ELAFIX 40 for installation in filler necks from DN 40. This adapter allows the refuelling of urea solution with ZVA AdBlue, without the risk of misfuellings.</p> <p>ELAFIX 40</p>  <p>Elastic fastenings</p>
--	-----------	---

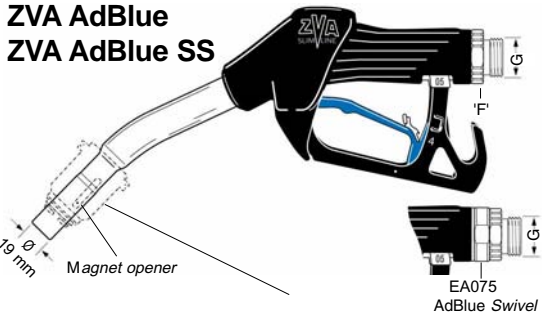